



SEIBU ELECTRIC & MACHINERY CO., LTD. is a factory that has acquired ISO 9001 quality management system and ISO 14001 environmental management certification.

SEIBU ELECTRIC & MACHINERY Co., LTD.

Precision Machine Division	3-3-1 Eki-higashi, Koga, Fukuoka 811-3193 TEL +81-92-941-1509 FAX +81-92-941-1521
Head Office & Factory	3-3-1 Eki-higashi, Koga, Fukuoka 811-3193 TEL +81-92-941-1500 FAX +81-92-941-1511
Tokyo Branch	Tachibana Kameido Bldg 3F, 2-26-11 Kameido, Koto-ku, Tokyo 136-0071 TEL +81-3-5628-0011 FAX +81-3-5628-0022
Osaka Branch	Mainichi Shimbun Bldg 5F, 3-4-5 Umeda, Kita-ku, Osaka 530-0001 TEL +81-6-4796-6711 FAX +81-6-4796-6707
Nagoya Sales Office	2-3101 Hara, Tenpaku-ku, Nagoya 468-0015 TEL +81-52-800-5051 FAX +81-52-800-5030
Kyushu Sales Office	3-3-1 Eki-higashi, Koga, Fukuoka 811-3193 TEL +81-92-941-1530 FAX +81-92-941-1522
Hiroshima Sales Office	2-2-9 Otemachi, Naka-ku, Hiroshima 730-0051 TEL +81-82-545-1615 FAX +81-82-545-1618
Sapporo Local Office	8-352 Kita Sanjo Higashi, Chuo-ku, Sapporo 060-0033 TEL +81-11-221-0521 FAX +81-11-221-3392
Sendai Local Office	17-22 Futsukamachi, Aoba-ku, Sendai, Miyagi 980-0802 TEL +81-22-797-6695 FAX +81-22-797-6696
Tokyo Service Center	1-13-2 Tajiri, Ichikawa, Chiba 272-0014 TEL +81-47-378-7261 FAX +81-47-378-7266
Osaka Service Center	1-17 Nakasoujicho, Ibaraki, Osaka 567-0803 TEL +81-726-30-5850 FAX +81-726-30-5852
Nagoya Service Center	2-3101 Hara, Tenpaku-ku, Nagoya 468-0015 TEL +81-52-800-5051 FAX +81-52-800-5030
Kyushu Service Center	3-3-1 Eki-higashi, Koga, Fukuoka 811-3193 TEL +81-92-941-1530 FAX +81-92-941-1522

For more details of our products, please use our inquiry form in the website below.
www.seibudenki.co.jp
(for the North America market visit www.kgki.com)

Be sure to read the "Instruction Manuals" and "Safety Precaution Manual" before use to ensure proper and safe use.

- Reference values in this catalog are based on in-house testing only.
- Products in this catalog are controlled products and/or technologies as covered in the Foreign Exchange and Foreign Trade Law of Japan. An export license from the Japanese government is required for export of these products or software.
- All specifications are subject to change without notice.

Seibu Electric & Machinery Co.,Ltd.



4147-2
Issue: May 2023

Seibu

High-Precision Seibu EDM Technology

SuperMM80B
MM75B
M75B

MM50UP
MM35UP
M50HP
M35HP


Installed by *Smart NC*



History of Seibu Wire Electrical Discharge

Machine, which continues to demand evolution

1972~



EW-20

Development of world's first CNC wire EDM machine

1972



EW-30

1974



EW-25

High-speed cutting realized by high-speed power transistors

1979



EW-600

1980



EW-400E

Developed AWF1 for automatic wire feeder

1981



EWP-300A

Development of high-precision double-column wire EDM

1983



EW-400F

Development of color monitor CNC device

1985~



EW-450K

Developed wire auto-feeding device AWF2B (annealing method) Feeding at wire break point

1985



EW-450K1

1988



EW-A5S

Development of submerged type wire EDM

1991



EW-450K2

1993



EWP-B3S

Development of submerged-type ultra-precision wire EDM

1996



EW-450K3

Development of color LCD monitor CNC device

1998



EW-C5S2

2000


2001~



M500S

Adoption of FANUC CNC

2003



SuperMM500S

Achieves pitch accuracy of $\pm 1\mu\text{m}$

2008



M50A

2010



M25LP

Development of wire EDM using oil

2013



M50B

2017



MEX15

Oil-spec ultra-precision machine applicable for $\Phi 0.03$ wire

2018



MM50UP

2022


Lineup of water specification wire EDM machines



*Refer to the MEX15 catalog concerning the MEX15.

Combining traditional manufacturing practices and techniques with the latest technology

Seibu created the world's first CNC wire electrical discharge machine (W-EDM) in 1972. Since then, we have steadily improved the productivity and precision of our expanding line of W-EDM systems. Adding new functions, Seibu is constantly researching and improve the user's productivity. Seibu developed oil type Ultra Precision Wire EDM "M25LP" which brings EDM manufacturing to a wider range of products. M25LP is ideal, for the manufacturing of lead frames, carbide machining, small electronic and medical components. The secret behind our unsurpassed precision is repeated "Kisage" hand scraping, while attaining a level of flatness that cannot be reached with machining.

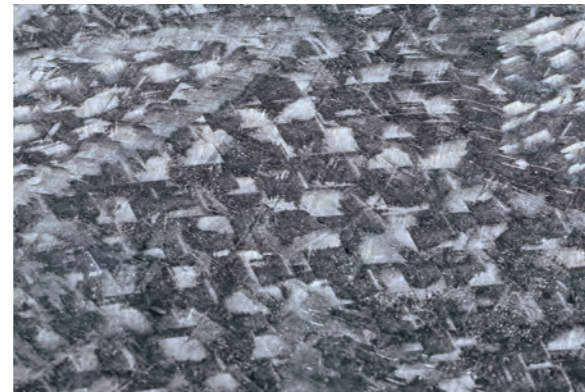

Scraped surface



Scraping



Our traditional "Kisage" scraping technique


Ultra-precision machine 800 x 600

Achieves an incredible pitch accuracy of $\pm 1 \mu\text{m}$ with the largest cutting area in the series


SuperMM80B



Work Table

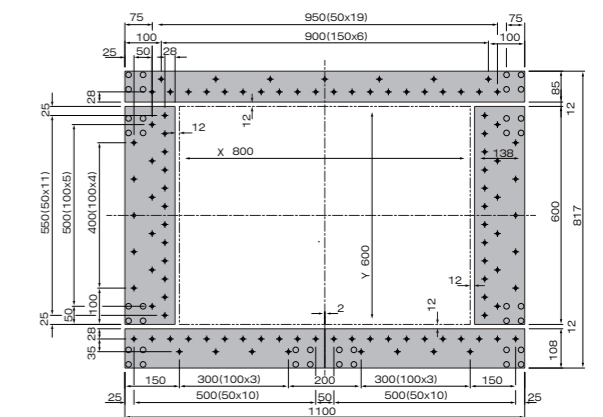


Layout

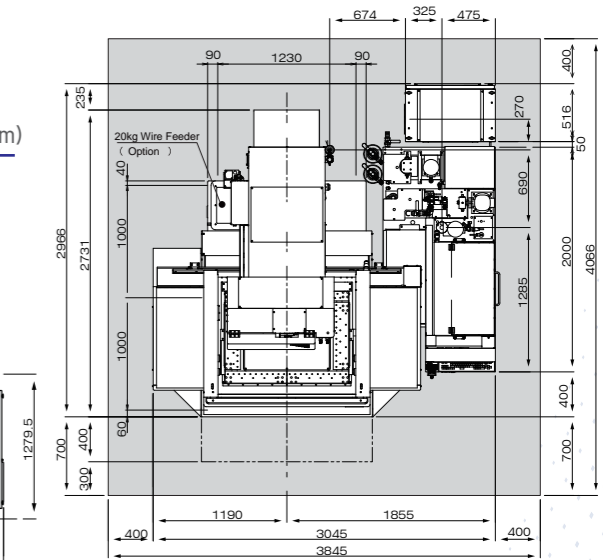

Dimension

(Unit: mm)

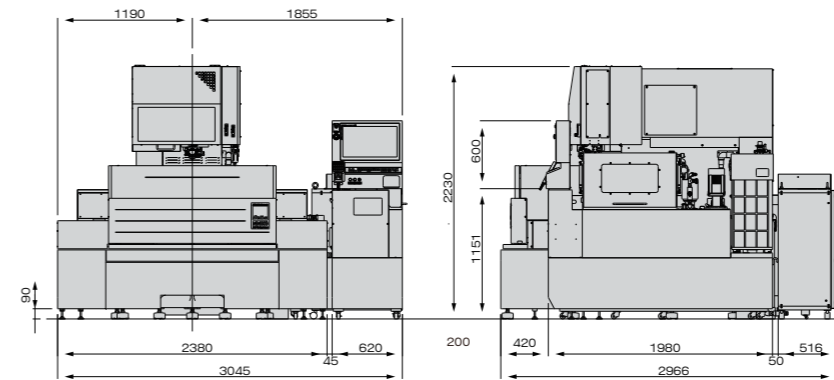

Standard Specifications		SuperMM80B	Power Supply	MPSC-20
Max. workpiece dimensions	WxDxH	1,000x800x150mm	Input power source	3-phase 200V/220V $\pm 10\%$ 11kVA, 50/60Hz
Max. workpiece weight		600kg	Weight	160kg
Axis travel range	XxYxZ	800x600x230mm	Filtration device	MF1100BD
Automatic wire feeding device		AWF-4 equipped as standard	Tank capacity	1,100L
U-V axis travel	UxV	$\pm 60 \times \pm 60$ mm	Filter element	4 paper filters $\Phi 340 \times 300$ mm
Max. taper angle		$\pm 10^\circ$ /work thickness 150mm ($\pm 45^\circ$ /40mm: Option)	Deionizer	Ion exchange resin 20L
Dimensions	WxDxH	2,380x2,400x2,155mm	Weight	350kg
Weight		6,300kg		
Control device		SmartNC		
Input system		MDI, Ethernet, USB		
Display		21.5 inch TFT multi-touch screen		
Axis controlled		5 axis (simultaneously 4 axis)		
Least input increment		0.01 μm		
Least command increment		0.01 μm		
Program memory capacity		1GB		

Wire diameter : $\Phi 0.1$ mm to 0.3 mm ($\Phi 0.2$ mm is standard.)


High precision machine 750x500
Precision machine 750x500

MM75B/M75B


High precision, large workpiece




■ Work Table

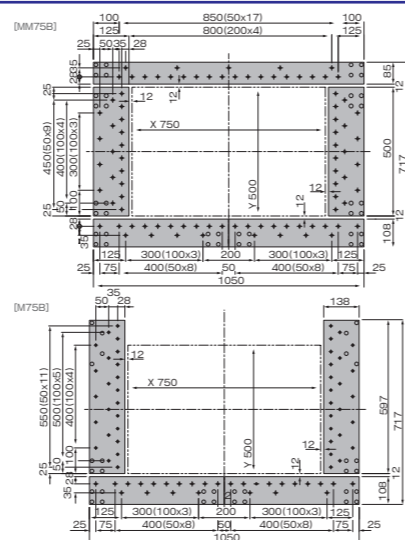

■ Layout

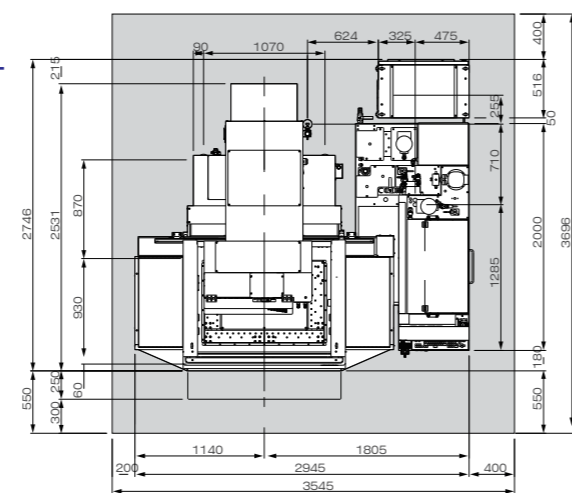

■ Dimension (Unit: mm)

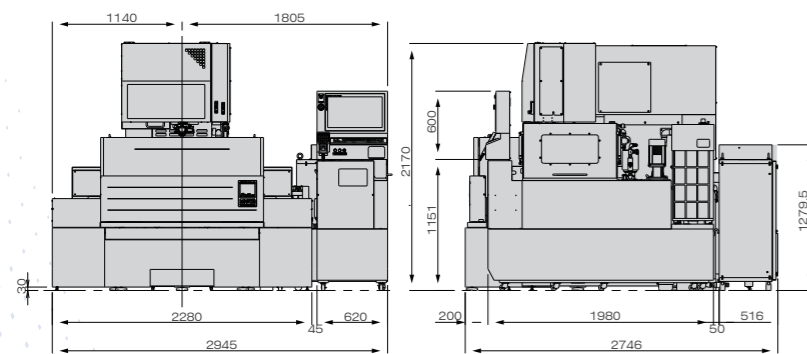

Standard Specifications	MM75B	M75B
Max. workpiece dimensions WxDxH	900x700x220(270*1)mm	900x700x250(300*2)mm
Max. workpiece weight	1,000kg	
Axis travel range XxYz	750x500x280mm	750x500x310mm
Automatic wire feeding device	AWF-4 equipped as standard	
U-V axis travel UxV	±60x±60mm	
Max. taper angle	±10° /work thickness 270mm ±10° /work thickness 300mm (±45° /40mm: Option)	
Dimensions WxDxH	2,280x2,200x2,155mm	
Weight	5,100kg	
Control device	SmartNC	
Input system	MDI, Ethernet, USB	
Display	21.5 inch TFT multi-touch screen	
Axis controlled	5 axis (simultaneously 4 axis)	
Least input increment	0.01 (MMB)/0.1 (MB) μm	
Least command increment	0.01 (MMB)/0.1 (MB) μm	
Program memory capacity	1GB	

Power Supply	MPSC-20
Input power source	3-phase 200V/220V±10% 11kVA, 50/60Hz
Weight	160kg
Filtration device	MF1100BD
Tank capacity	1,100L
Filter element	4 paper filters φ340×300mm
Deionizer	Ion exchange resin 20L
Weight	350kg

Wire diameter: (φ0.2mm is standard.)	
MM75B	M75B
φ0.05mm to 0.3mm	φ0.07mm to 0.3mm

*1 Flush cutting available for work 220 to 270mm high (MM75B).
*2 250 to 300mm (M75B)


Ultra-precision machine 500x400

MM50UP


±1 μm pitch accuracy is achieved to reduce the jig grinding process, which contributes to shortening delivery time in high-precision die production.




■ Work Table

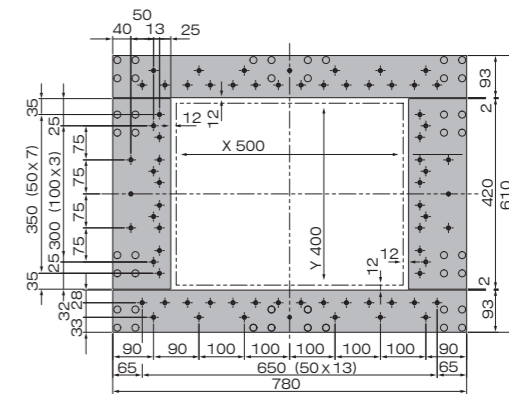

■ Layout

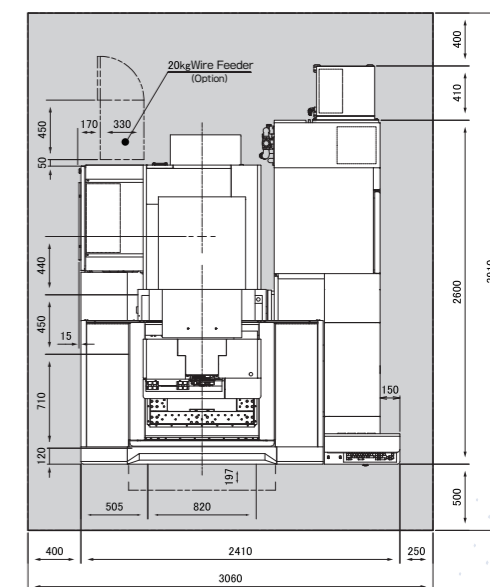

■ Dimension (Unit: mm)

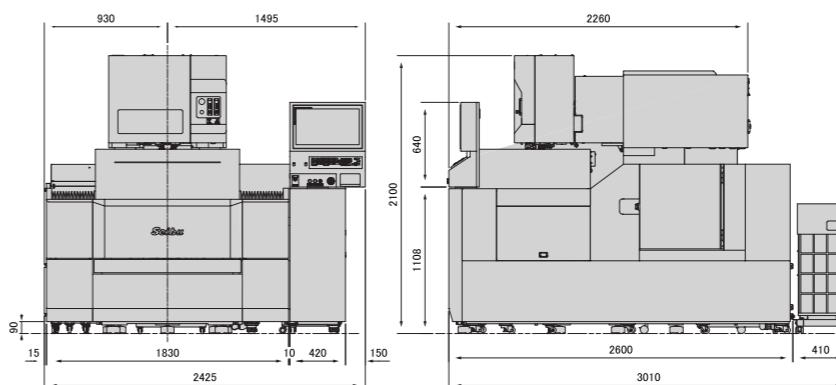

Standard Specifications	MM50UP
Max. workpiece dimensions WxDxH	850x730x300mm
Max. workpiece weight	800kg
Axis travel range XxYxZ	500x400x310mm
U-V axis travel UxV	±60x ±60mm
Max. taper angle	±10° /work thickness 300mm (±45° /40mm: Option)
Dimensions WxDxH	1,915x2,260x2,035mm
Weight	3,500kg
Control device	SmartNC
Input system	MDI, Ethernet, USB
Display	21.5 inch TFT multi-touch screen
Axis controlled	5 axis (simultaneously 4 axis)
Least input increment	0.01 μm
Least command increment	0.01 μm
Program memory capacity	1GB

Power Supply	MPSC-20
Input power source	3-phase 200V/220V±10% 11 kVA, 50/60Hz
Weight	160kg
Filtration device	MF50
Tank capacity	740L
Filter element	4 paper filters φ340×300mm
Deionizer	Ion exchange resin 20L
Weight	430kg

Wire diameter : φ0.05 to φ0.3mm (φ0.2mm is standard.)	
---	--


Precision machine

500 x 400


M50HP

Standard type with high speed, high precision, and advanced functions

■ Work Table

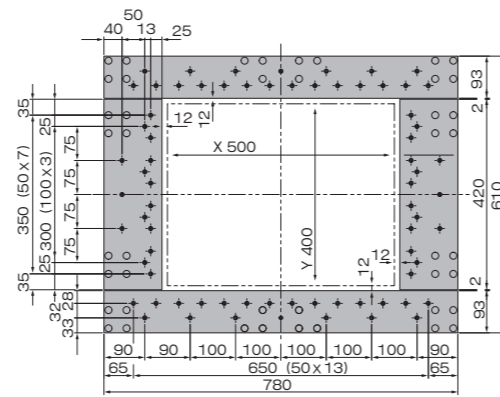


■ Layout

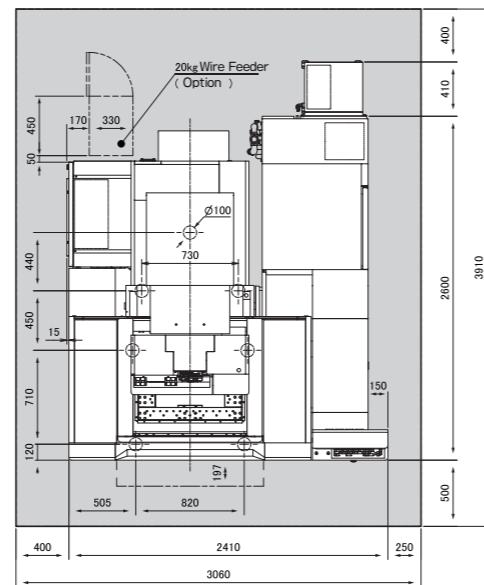

■ Dimension

(Unit: mm)

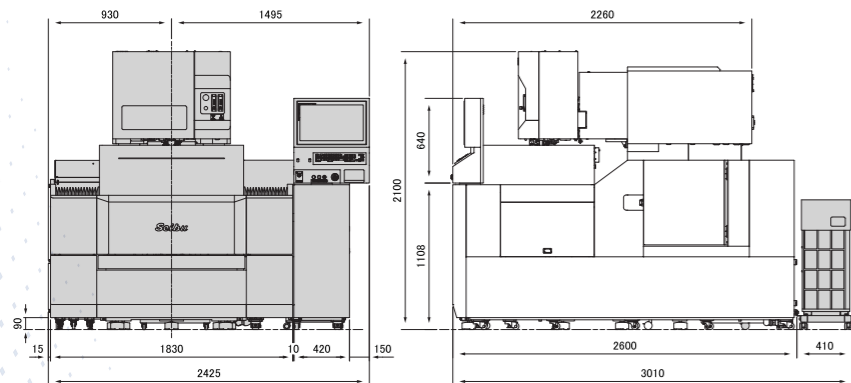

Standard Specifications		M50HP
Max. workpiece dimensions	W×D×H	850×730×300mm
Max. workpiece weight		800kg
Axis travel	X×Y×Z	500×400×310mm
U-V axis travel	U×V	±60×±60mm
Max. taper angle		±10° /work thickness 300mm (±45° /40mm: Option)
Dimensions	W×D×H	1,915×2,260×2,035mm
Weight		3,500kg
Control device		SmartNC
Input system		MDI, Ethernet, USB
Display		21.5 inch TFT multi-touch screen
Axis controlled		5 axis (simultaneously 4 axis)
Least input increment		0.01 μm
Least command increment		0.01 μm
Program memory capacity		1GB

Power Supply	MPSC-20
Input power source	3-phase 200V/220V±10% 11 kVA, 50/60Hz
Weight	160kg
Filtration device	MF50
Tank capacity	740L
Filter element	4 paper filters Φ340×300mm
Deionizer	Ion exchange resin 20L
Weight	430kg

Wire diameter : Φ0.07 to Φ0.3mm
(Φ0.2mm is standard.)


Ultra-precision machine

350 x 300


MM35UP

±1 μm pitch accuracy is achieved to reduce the jig grinding process, which contributes to shortening delivery time in high-precision die production.

■ Work Table

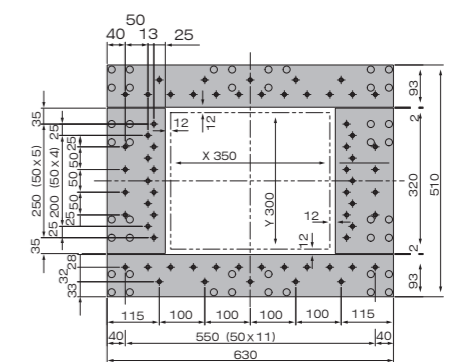


■ Layout

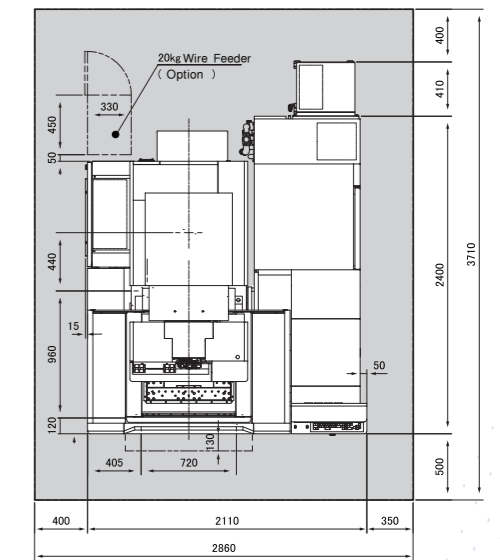

■ Dimension

(Unit: mm)

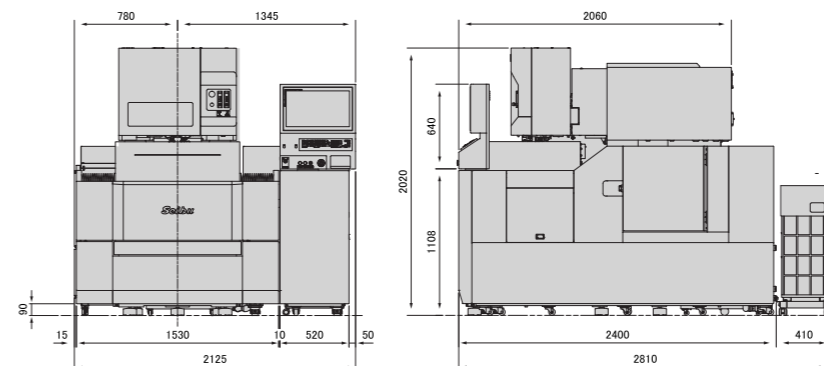

Standard Specifications		MM35UP
Max. workpiece dimensions	W×D×H	700×630×220mm
Max. workpiece weight		350kg
Axis travel range	X×Y×Z	350×300×230mm
U-V axis travel	U×V	±60×±60mm
Max. taper angle		±10° /work thickness 220mm (±45° /40mm: Option)
Dimensions	W×D×H	1,640×2,060×1,955mm
Weight		2,900kg
Control device		SmartNC
Input system		MDI, Ethernet, USB
Display		21.5 inch TFT multi-touch screen
Axis controlled		5 axis (simultaneously 4 axis)
Least input increment		0.01 μm
Least command increment		0.01 μm
Program memory capacity		1GB


Power Supply	MPSC-20
Input power source	3-phase 200V/220V±10% 11 kVA, 50/60Hz
Weight	160kg
Filtration device	MF35
Tank capacity	700L
Filter element	4 paper filters Φ340×300mm
Deionizer	Ion exchange resin 20L
Weight	400kg

Wire diameter : Φ0.05 to Φ0.3mm
(Φ0.2mm is standard.)


Standard type with high speed, high precision, and advanced functions

M35HP


■ Work Table

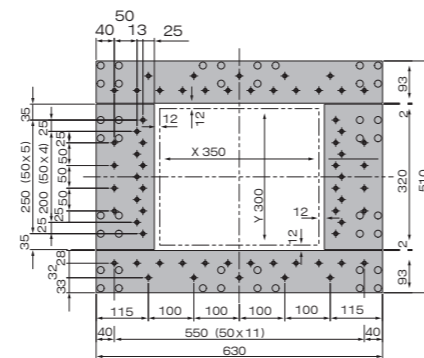

■ Layout

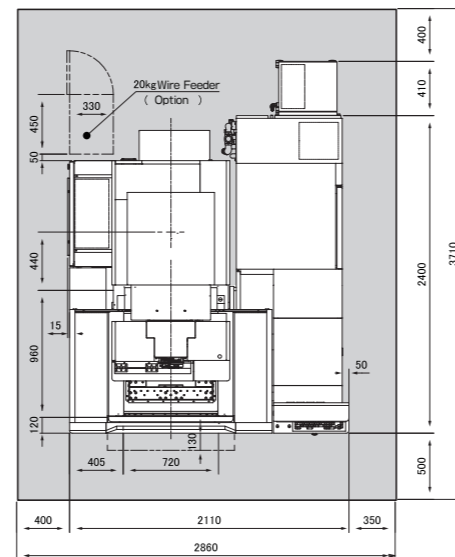


■ Dimension (Unit: mm)

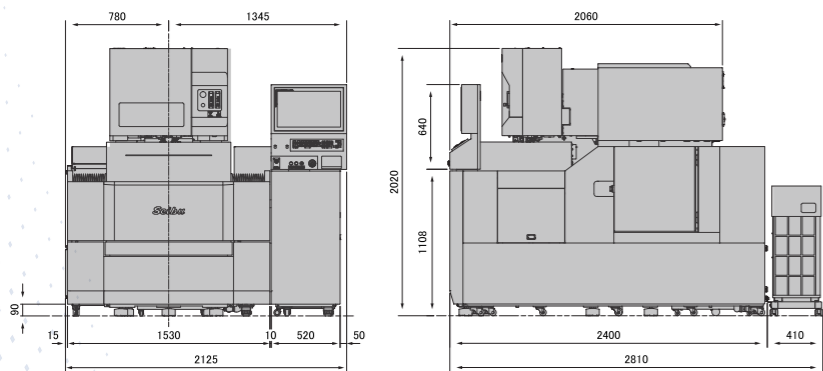

Standard Specifications		M35HP	Power Supply		MPSC-20
Max. workpiece dimensions	W×D×H	700×630×220mm	Input power source	3-phase 200V/220V±10% 11 kVA, 50/60Hz	
Max. workpiece weight		350kg	Weight	160kg	
Axis travel	X×Y×Z	350×300×230mm	Filtration device	MF35	
U-V axis travel	U×V	±60× ±60mm	Tank capacity	700L	
Max. taper angle		±10° /work thickness 220mm (±45° /40mm: Option)	Filter element	4 paper filters Φ340 ×300mm	
Dimensions	W×D×H	1,640×2,060×1,955mm	Deionizer	Ion exchange resin 20L	
Weight		2,900kg	Weight	400kg	
Control device		SmartNC	Wire diameter : Φ0.07 to Φ0.3mm (Φ0.2mm is standard.)		
Input system		MDI, Ethernet, USB			
Display		21.5 inch TFT			
Axis controlled		5 axis (simultaneously 4 axis)			
Least input increment		0.01 μm			
Least command increment		0.01 μm			
Program memory capacity		1GB			

Seibu functions supporting ultra-precision cutting


◆ Seibu advanced functions aligned with an ultra-precision cutting workflow

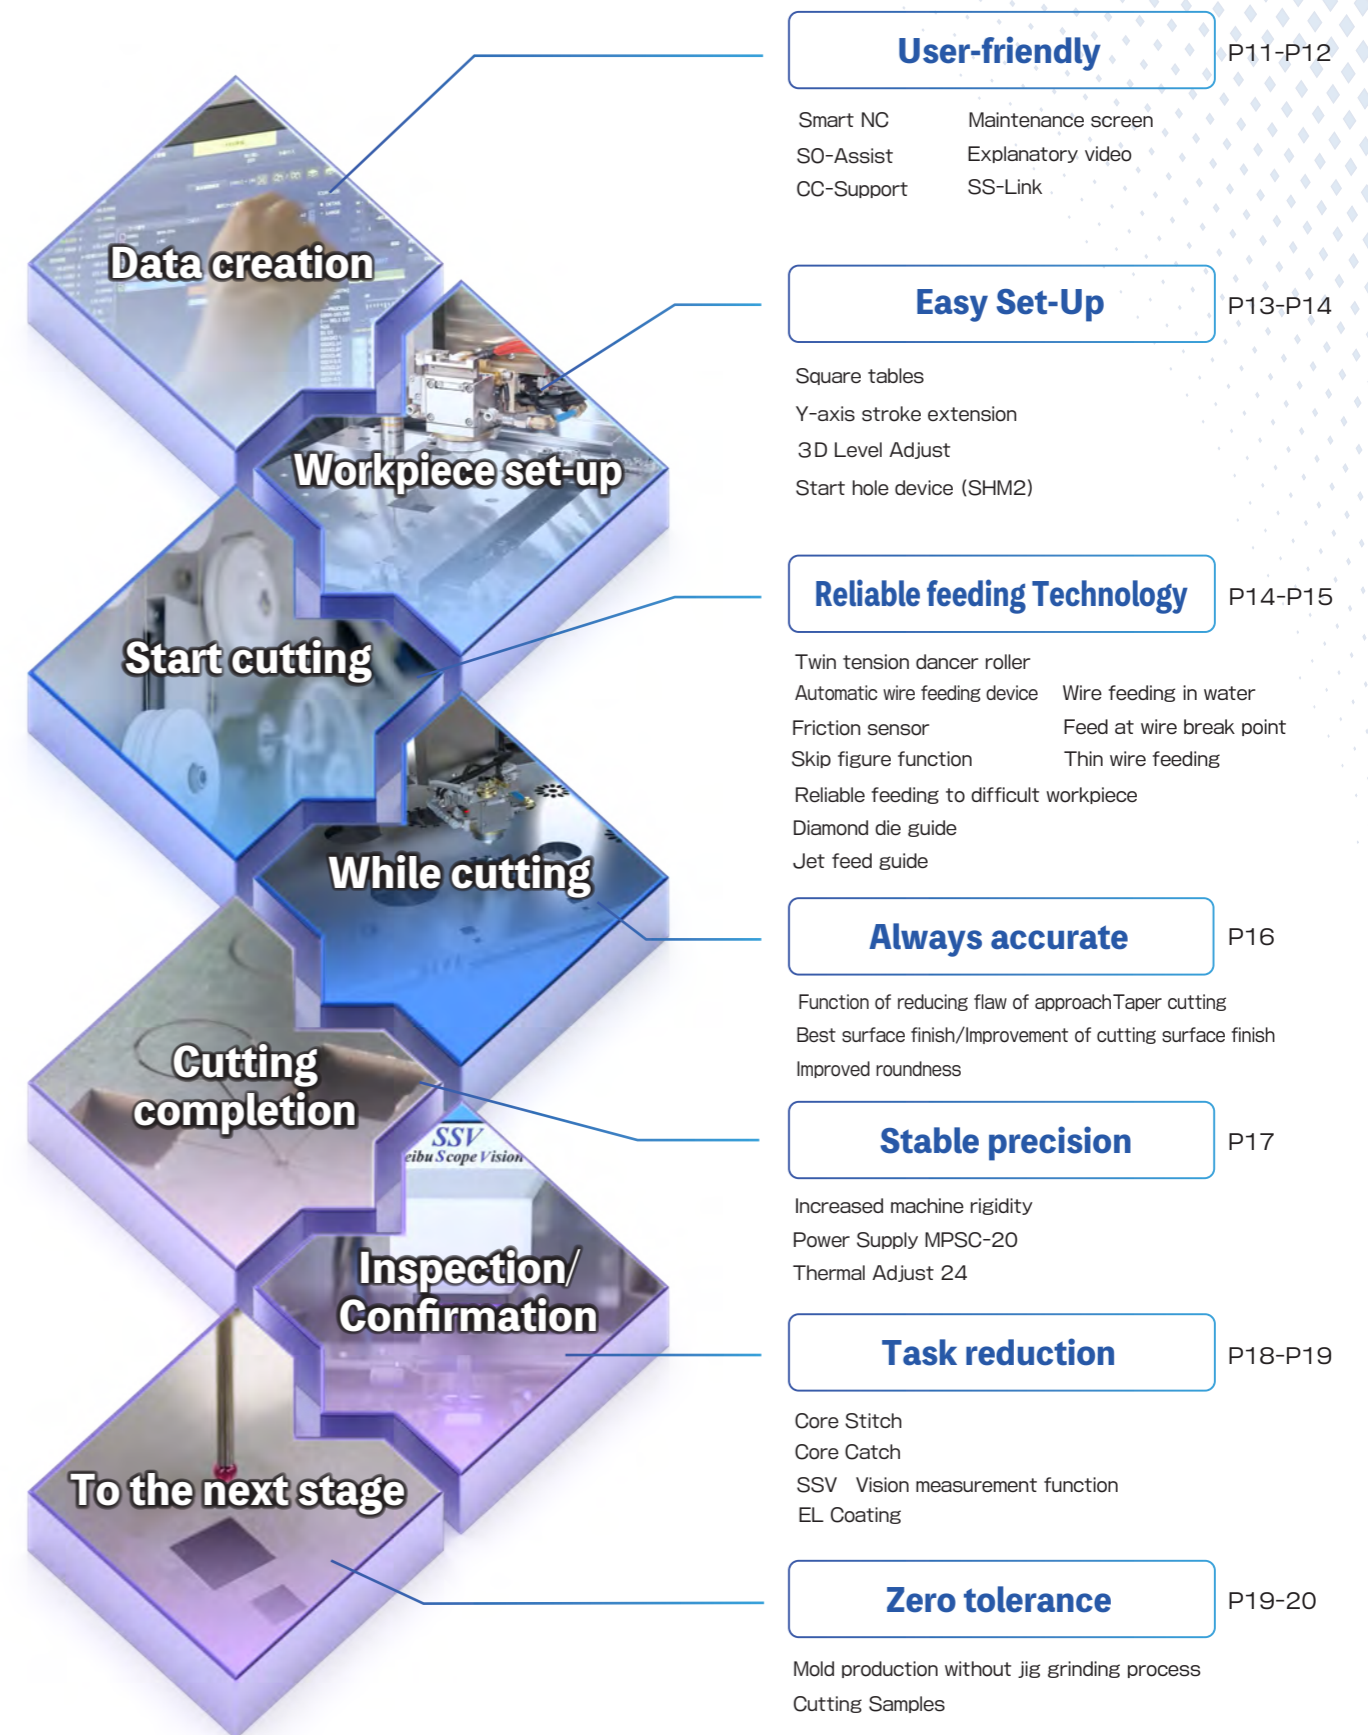


◆ Operating interface with easy-to-see graphics with a smartphone feel

We have achieved an operating environment with a smartphone feel by using a multi-touch panel with a large screen of 21.5 inch. For the screen design we have maintained the same system of operation while using graphics to improve the clarity and user-friendliness.


1. Edit: additional multi-editing feature that is self-explanatory with the preview function

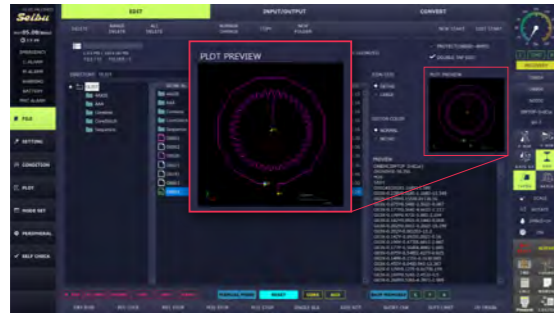

2. Cutting Conditions: set the conditions quickly with the scrolling search engine

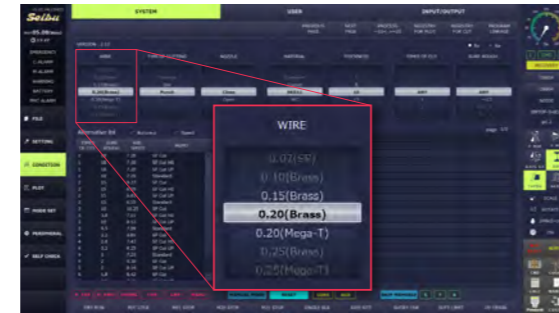

3. Drawing: easy check with expanding, shrinking, and rotation using the multi-touch feature

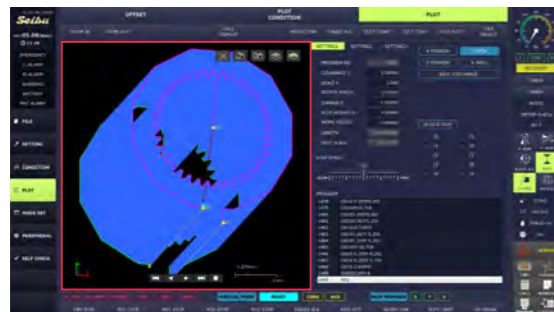

4. Positioning: increase the set-up efficiency with the abundant types of positioning functions



5. Cutting: confirm the cutting progress in real time



CAM-Station: NC program conversion is possible from the CAD data (2D/3D)



*Option

◆ New maintenance screen

(MM-UP/M-HP Series)

We have added a cost calculation feature, a history feature, and a feature for viewing the replacement and cleaning procedures. The replacement and cleaning procedures can be checked in our videos or manual, so support is provided that is easy to understand even for beginners.


Easy-to-understand usage status with the icon and graph for each part.

Explanatory video

A manual that is text searchable.

◆ Simple operation assist SO-Assist

We have developed an assist feature that can confirm in order of process the operations required from entering the program into the machine up to the processing. The required operations can be confirmed with the operation assist feature when the operator is inexperienced or confirmation of the operations is desired.

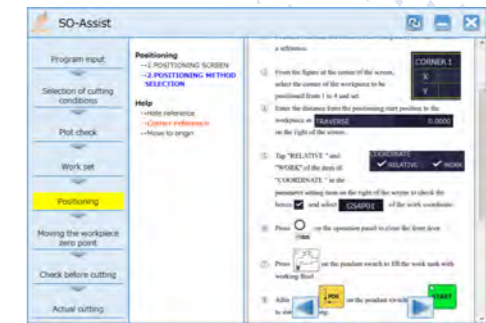

The process flow on the operation assist screen is linked to the main screen.


◆ Cutting condition support CC-Support

We have added a cutting condition adjustment feature for measurements, straightness, corner dull and leftovers, approach flaws, and step flaws. It is easy to adjust the cutting conditions by setting the meter to the desired adjustable amount.



◆ Operation Status Notification Feature SS-Link

The user can confirm the progress while the machine is cutting anytime and anywhere on a smartphone, tablet, PC, etc. The feature now also supports social media such as LINE and Slack.

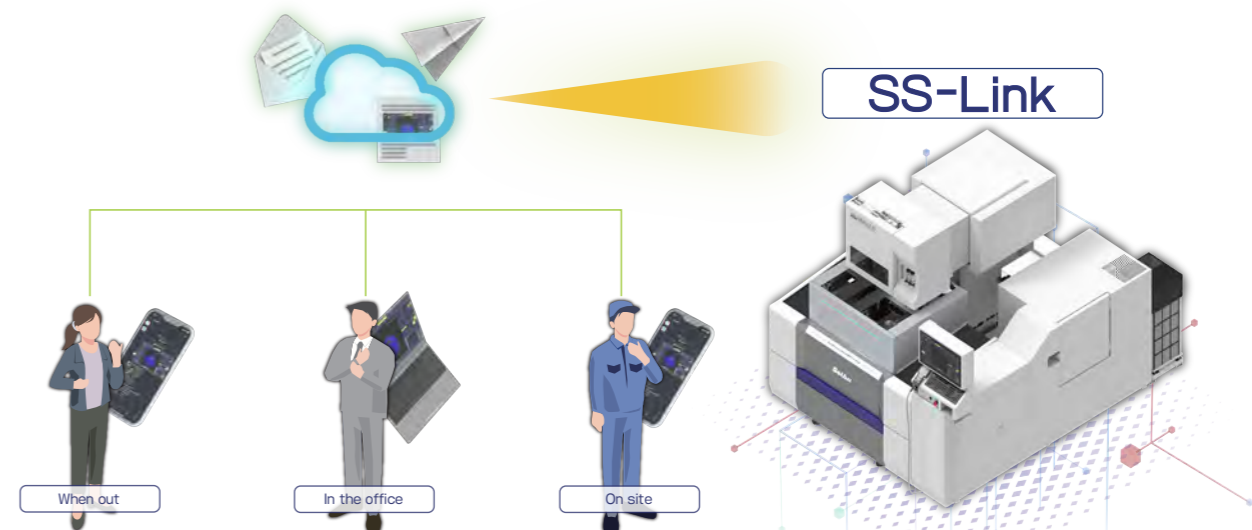


- The M-HP Series, MM-UP Series support this feature as standard.
- This feature is an option for machines with Windows 10 Version SmartNC, such as MEX15, the MB Series, the MMB Series, UltraMMB, SuperMMB80B (Available after shipment)

Easy Set-Up

Newly Designed Work Table (MM-UP/M-HP Series)

◆ Square tables equipped as standard


All models are equipped with square-type work table as standard. Since workpiece set-up is possible at the back of the table, workability can be improved. Work table insulation specification is available for MMUP series only. (Not applicable to M-HP series.)

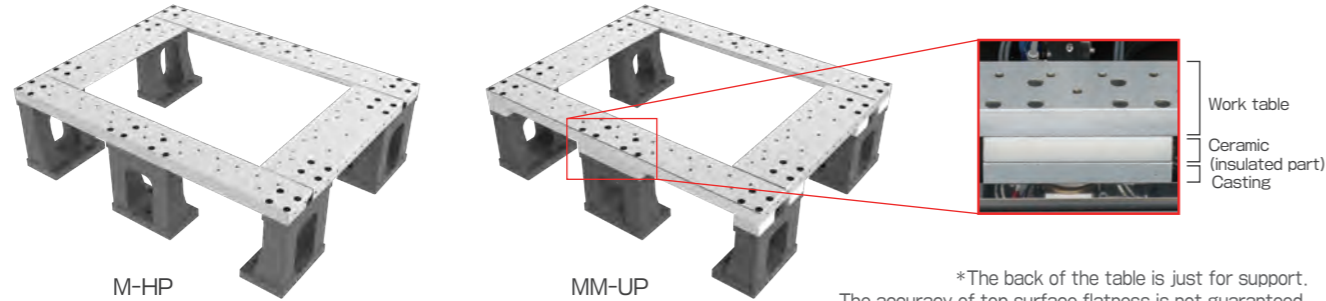

*The back of the table is just for support. The accuracy of top surface flatness is not guaranteed.

◆ Y-axis stroke extension

Y axis stroke has been extended by 50 mm to expand the cutting range. By setting two plates, whereas only one plate could be set in the past, which contributes to productivity improvement.

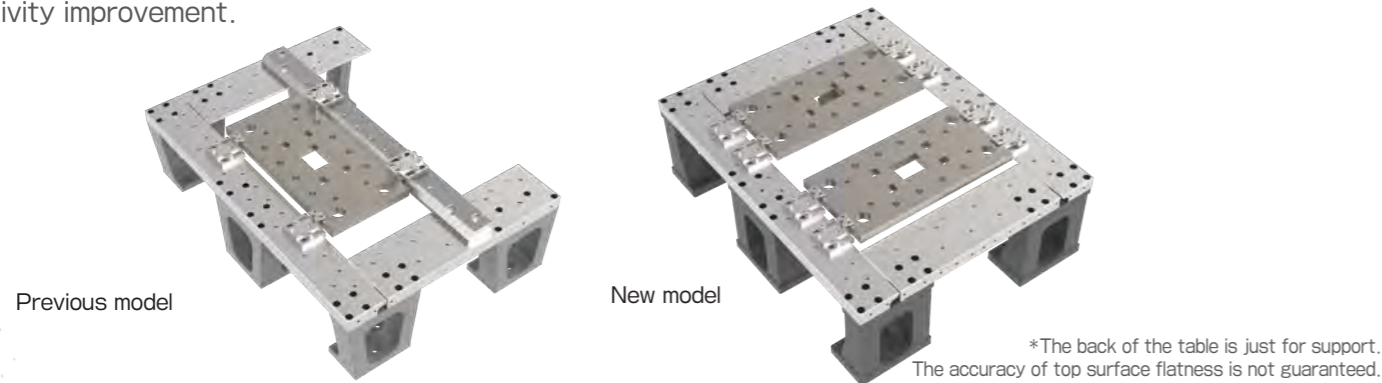

*The back of the table is just for support. The accuracy of top surface flatness is not guaranteed.

Easy Set-Up


3D Level Adjust® (Option)

◆ Automatic correction for vertical accuracy


Three points on the upper face of workpiece can be measured with high precision touch probe sensor mounted on the upper head.

It is possible to adjust the wire alignment automatically with reference to the workpiece inclination to the work table.

Spark positioning and horizontal adjustment jig becomes unnecessary due to this function, which reduces set-up time.

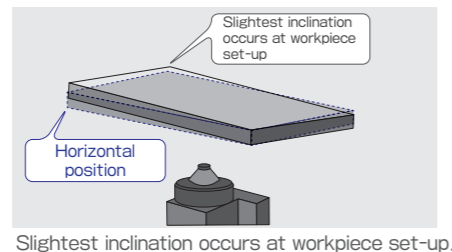


Slightest inclination occurs at workpiece set-up.

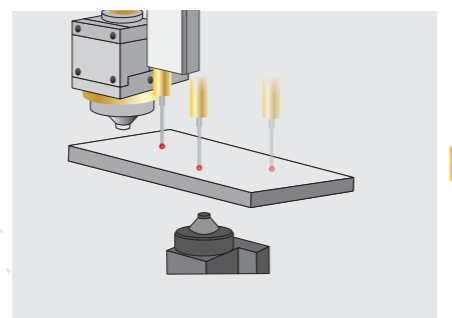

Three points on the upper face of workpiece are measured with touch probe sensor and the inclination of workpiece is calculated.

[3D Level Adjust Plus]

Shape measurement after cutting can be performed by adding software to this option.

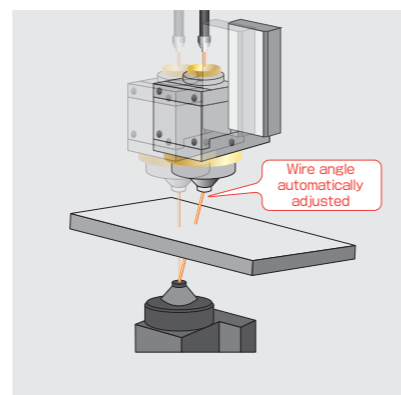

UV axis are automatically adjusted so that wire can become vertical to the workpiece.

Easy Set-Up

Start hole device® SHM2 (Option)

◆ SHM = Simple type start-hole cutting device

SHM2 is a start-hole drill that can be easily mounted on a machine. Hole-drilling is possible for hardened workpiece or tungsten carbide (WC).

- Standard $\Phi 1.0$ pipe electrode
- Max. workpiece thickness 60mm
- Drilling speed 10mm/min (SKD11)


Setting operation cutting conditions can be easily performed using a dedicated operation screen.

- Applicable electrode diameter $\Phi 0.3, \Phi 0.5, \Phi 0.8, \Phi 2.0, \Phi 3.0$

Start hole device (SHM2) is Seibu unique function.



Start hole device (SHM2) mounting

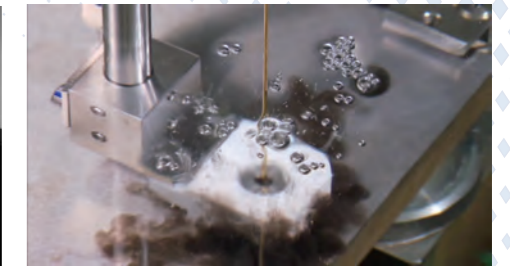

Start hole drilling



Dedicated screen



Electrode diameter	SKD11		WC	
	Maximum drilling height (mm)	Average drilling speed (mm/min)	Maximum drilling height (mm)	Average drilling speed (mm/min)
$\Phi 3.0$	60	5.0	40	1.5
$\Phi 2.0$	60	7.0	40	3.0
$\Phi 1.0$	60	10.0	40	4.0
$\Phi 0.8$	40	4.0	20	2.5
$\Phi 0.5$	10	3.0	10	1.0
$\Phi 0.3$	5	0.5	5	0.5

Reliable feeding technology

Thin wire travel (SMM80B/MM75B/MM-UP Series)


◆ Twin tension dancer roller

Through improvement in the wire tension system, we have achieved stable tension and reduced vibration when the wire is traveling. This has improved the cutting surface quality during finish cutting.

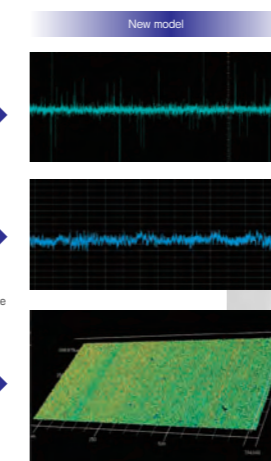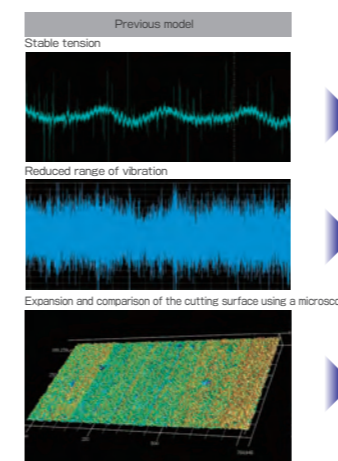


◆ Greatly improved automation efficiency

We have used the anneal dry method consistently since 1981. In recent years, we developed functionality that allows annealing in a fixed position without rotating the rollers. We are continuing advances that increase the wire feeding rate. This feature is essential for increasing the utilization rate and for automation of wire EDM.

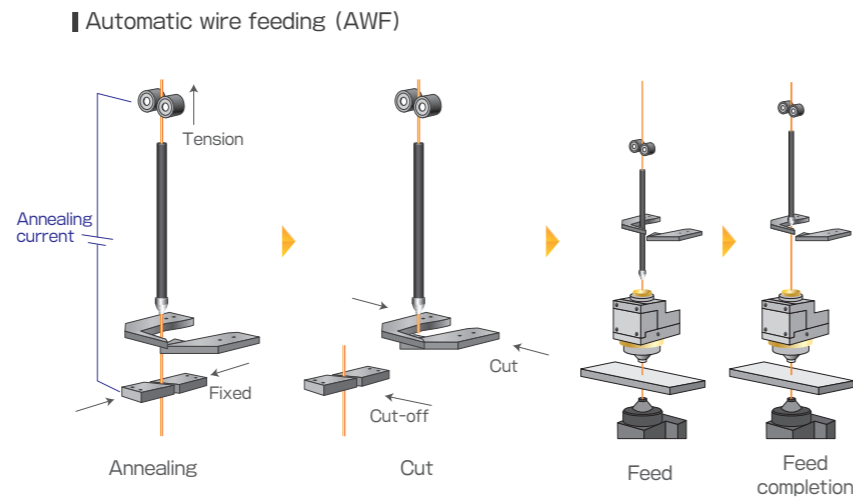

◆ All-in-one AWF

Feed at wire break point

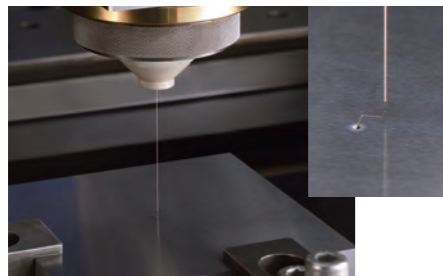

Wire can be reliably threaded even at the break point. This is an essential function for core stitch cutting.


Wire feeding in water

It is possible to thread wire in water, through slot due to anneal dry method.

Thin wire feeding


It contributes to the automatization of microfabrication.

Friction sensor

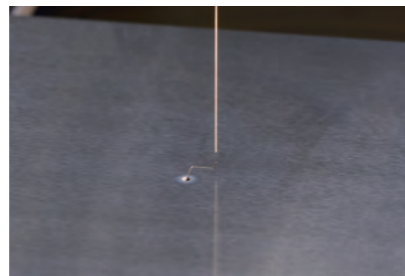


Using Seibu's patented "Friction sensor" technology, the wire can thread reliably through a start hole or slot. (PATENTED)

Friction Sensor Wire Feeding System

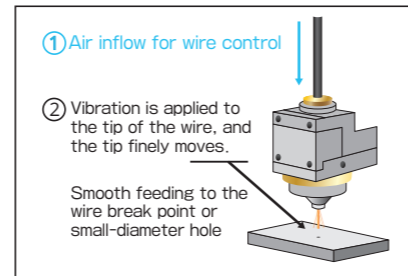

◆ Various functions

Reliable feeding to difficult workpiece | Round diamond die guide



It is possible to feed automatically through the slit of comb-shaped workpiece with annealing and friction sensor.



A Round guide is used that focuses on cutting accuracy. (Common to the upper and lower guides)


Jet feed guide (Option)



Water jet (option) is flushed from upper head nozzle to enhance the success rate of feeding. (Guides are not common to upper and lower guide.)



◆ Function of reducing flaw of approach

In general cutting, the discharge flaw was caused by passing two approach points (at approach and at escape). It is possible to reduce the flaw of approach part by correcting the path of both approach and escape. For other correction function, corner shape correction and taper cut correction are available.

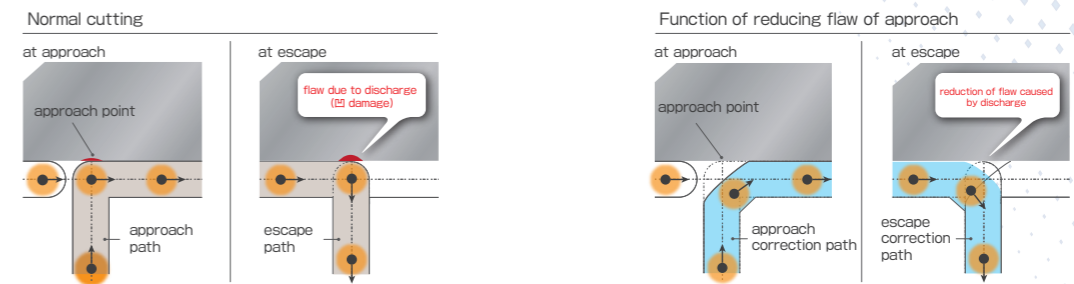


◆ Feature for increasing taper cutting accuracy

We have developed a feature that can recalculate the taper dimensions from the results of test cutting, and simultaneously correct the angle and dimension accuracy. We have greatly increased the taper angle accuracy and dimension accuracy.

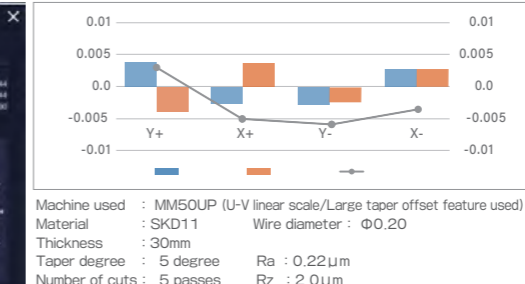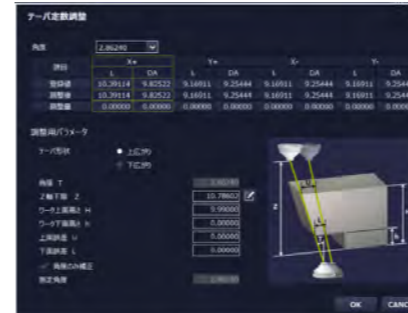


For the 4-directional taper offset feature, the large taper cutting option is required.

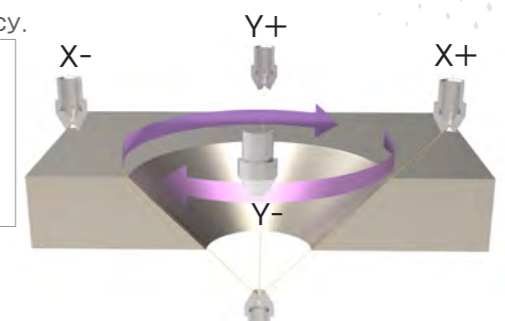


◆ Best surface finish/Improvement of cutting surface finish

The effect of the insulation table enables stable output of micro current pulses, resulting in improved surface finish, shorter finishing stroke, and shorter total cutting time. Especially we could achieve under Rz 0.5μm with steel.

Material : SKD11 Number of cuts : 4 passes Surface finish
Thickness : 30mm Model : M35HP Ra 0.264μm
Wire diameter : Φ0.20 Rz 2.092μm

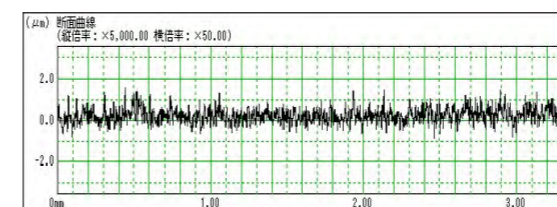


Material : SKD11 Number of cuts : 9 passes Surface finish
Thickness : 30mm Model : MM50UP Ra 0.064μm
Wire diameter : Φ0.10 Rz 0.448μm

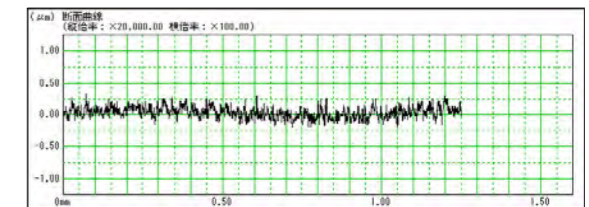


◆ Roundness

Straightness of XY axis has been improved and achieved roundness 0.81μm by stable table feed.



Material : STAVAX
Nozzle state : open nozzle
Wire diameter : Φ0.20
Hole dia.: Φ12mm
Model: M50HP

Roundness
1.32μm



Material: WC (G5)
Nozzle state: open nozzle
Wire diameter: Φ0.20
Hole dia.: Φ10mm
Model: MM50UP

Roundness
0.81μm

Stable precision


High Rigidity Mechanical Structure

◆ Increased machine rigidity


To achieve further stable cutting accuracy than MB Series, we reviewed the machine structure using CAE analysis, and 25% increase in rigidity compared to conventional model has been achieved.

Large displacement

Small displacement

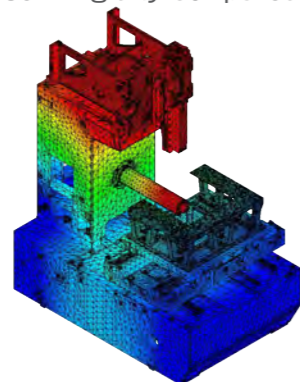

Previous model

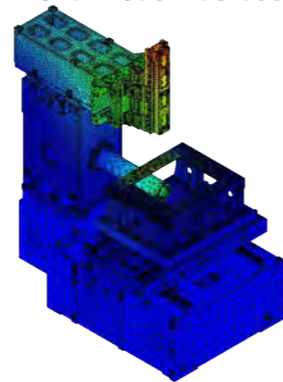


New model MM50UP

Stable precision

High Precision, Highly Efficient Power Supply MPSC-20

◆ Reduced power and wire consumption, energy savings, and low running cost

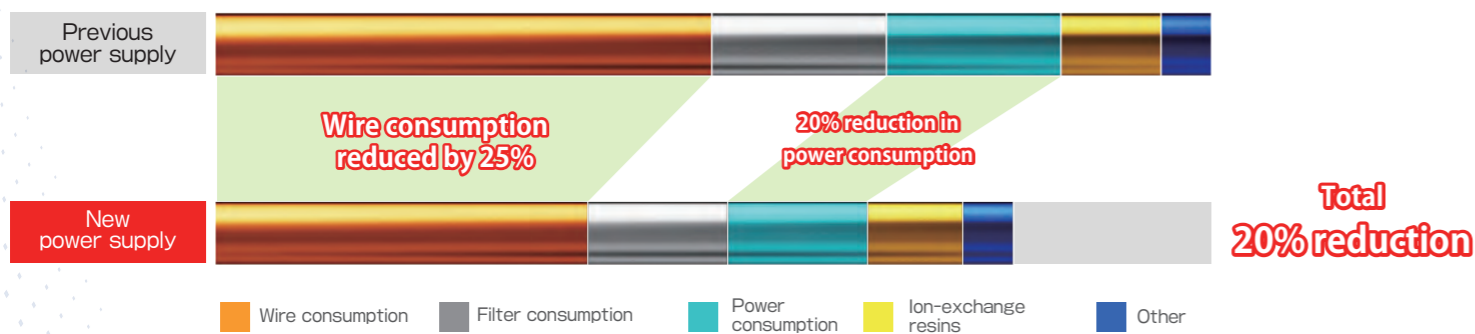


Stable precision

Thermal Adjust 24[®] (Option)


◆ Thermal displacement can be corrected by CNC.

Thermal Adjust 24 is a function to maintain wire verticality by correcting the thermal displacement caused by the temperature change between upper and lower head.

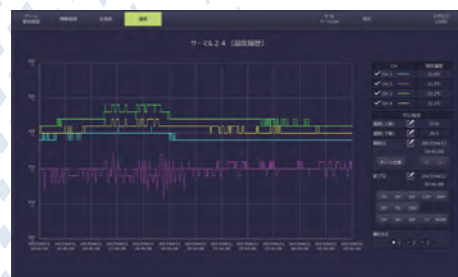

Temperature monitor screen

Wire vertical error was improved by 62% using this function. (in Seibu factory)

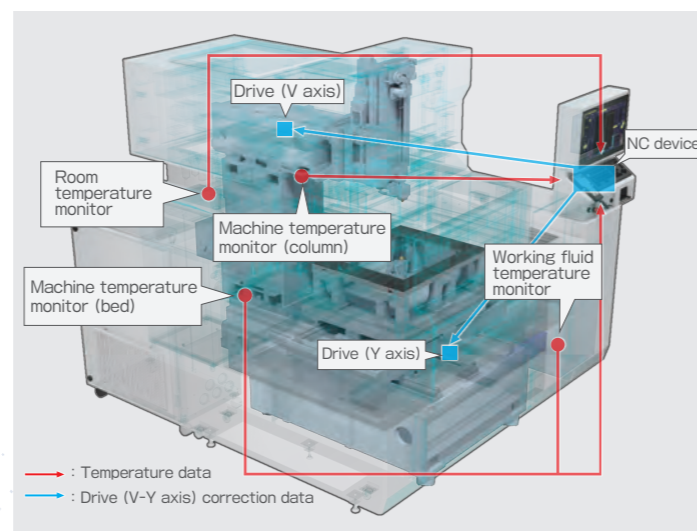

Task reduction


Vision measurement function SSV [Seibu Scope Vision[®]] (Option)

◆ High-precision automatic measurement on the machine

High-precision vision measurement with a camera is possible on the machine without removing the workpiece after cutting is completed.

A wide variety of measurement options are available for measuring various shapes. It is also possible to check the CAD data and the machined shape and perform the difference measurement.

- High-precision measurement of fine shapes
- Can be measured without removing the workpiece after cutting
- High-precision edge detection with transmitted illumination
- Available in a wide variety of measure options for measuring various machined workpieces
- CAD drawings (DXF) can be read for contour verification and difference measurement

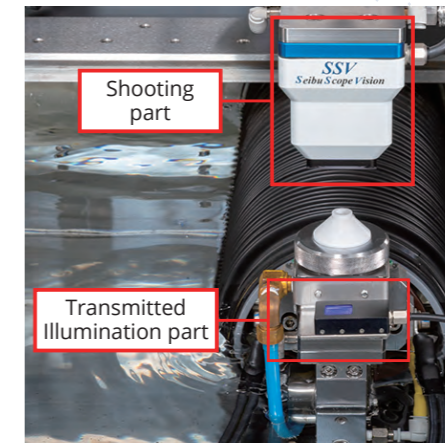

SSV Mounting

Specifications

Shooting part Magnification	1.3 million-pixel color camera Optical magnification 4x, monitor magnification approx. 100x
Digital zoom	Approx. 1600 times (at maximum zoom factor)
Lighting	Epi-illumination, Transmission (simultaneous lighting)
Focal distance	Standard 40mm
Measurement function	Points, lines, circles, squares, intersections, distances
External output	CSV output
CAD loading	DXF compatible (simultaneous movement possible)
Dimensions of the shooting part	66×66×70mm



Circle measurement screen

CAD verification screen


Task reduction

Core Stitch[®] (Option)

◆ Greatly improved automation efficiency

Since the brass can be welded on the part 1 mm from the upper face, it is possible to knock out the welded part by tapping on the slugs.

Conventional cut-off | Core Stitch

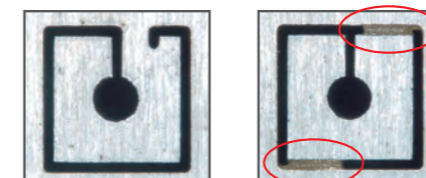

- You can solve the conventional problems quickly. (e.g. man-hour reduction, mistake prevention, relief of simple task)
- Simplification of NC program (Programming for cut-off part is not necessary.)
- Simple task by only tapping on the core

◆ Core Catch (Option)



Core Catch enables you to process welded core automatically. The hammer mounted on upper head knocks off the core made after Core Stitch cutting and the core can be automatically collected. This fully automated process realizes unmanned operation for die plate finish cut.

◆ Core Stitch conversion software (Option)




This is software for PC that optimizes the welding point and distance by analyzing NC programs and automatically inserts core stitch codes into NC programs.

Task reduction

EL Coating (Option)

Measure against tungsten corrosion

EL coating is unique technology that prevents cobalt (Co) from dissolving in water by means of coating the cutting surface with brass. This increases the endurance of the mold. This makes it possible to cut in water (not in oil), which reduces maintenance work.


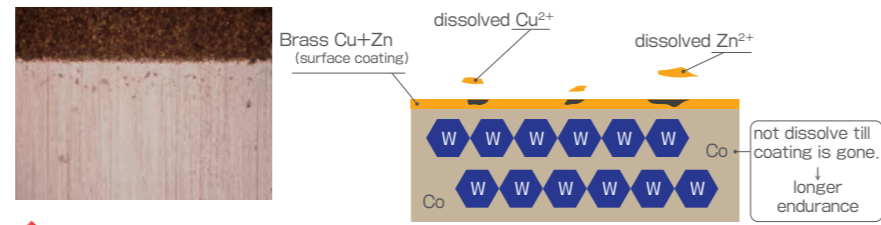


When tungsten carbide material is cut in water, the cobalt (as binder) starts to dissolve in water. As a result, the material becomes weak.


EL Coating
Cutting surface is coated with thin brass layer.

- Anti-corrosion is possible in water.
- Compared with cutting in oil, maintenance work is very easy.
- Endurance of mold is equal to mold produced in oil.

with EL coating

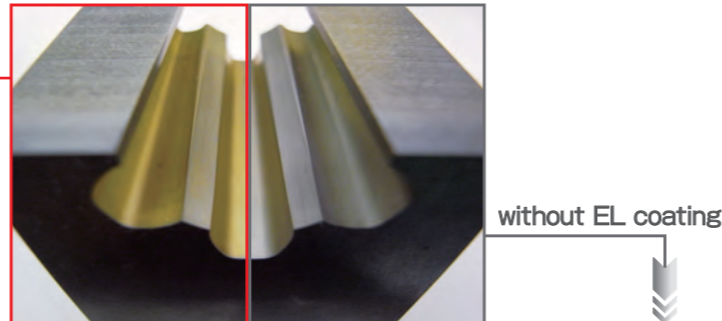

Cobalt (as binder) starts to dissolve. Material becomes weak.

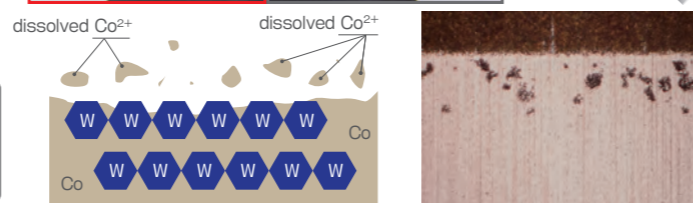

Zero tolerance

Ultra-precision Plate Cutting

Mold production without jig grinding process (MM50UP: cutting example)

Inserting the pins into three plates separately cut with different thickness (T20, 22, 25mm)



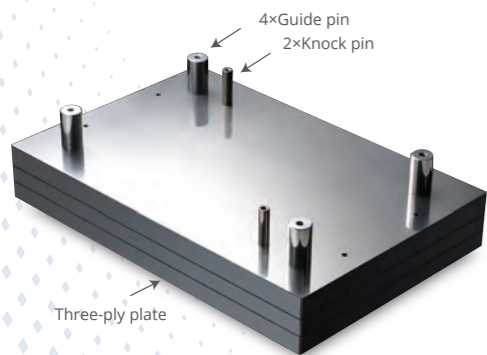


Plate cutting pitch accuracy

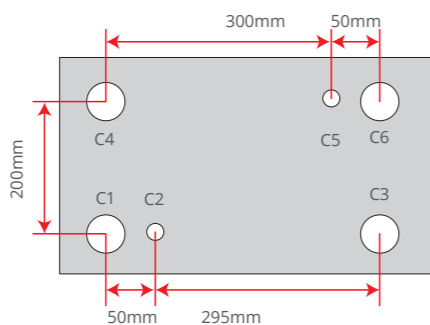


Material : SKD11
Thickness : 20, 22, 25mm
Number of cuts : 6 Passes
Wire diameter : $\Phi 0.2$
Ra : $0.19\mu\text{m}$

(mm) [pitch error]

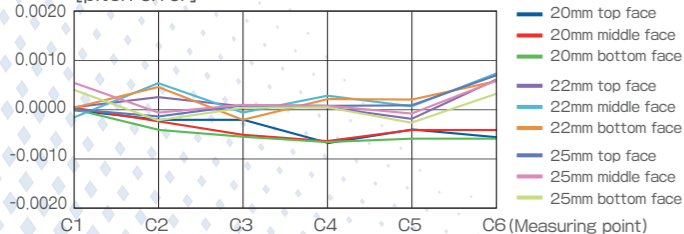

(mm) [pitch error]

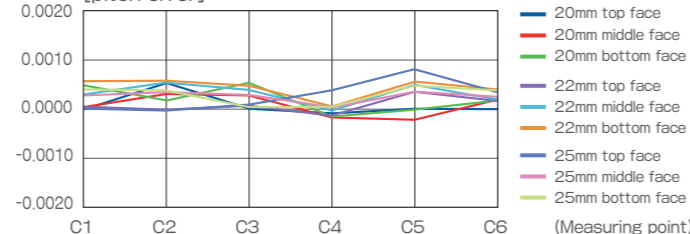

X axis pitch error Error range 0.0014mm

Y axis pitch error Error range 0.0010mm

Zero tolerance

Cutting Samples

Combination cutting



Material: SKD11 Surface finish: Ra 0.25 μm Rz 2.00 μm
Wire diameter: $\Phi 0.2$ Cutting time: 50 hours
Thickness: 60mm

Tall thickness cut



Dimension accuracy (mm)		
	Height	surface1 surface2
Top	120	20.0000 19.9990
	90	19.9990 19.9992
Middle	60	20.0000 19.9997
Bottom	30	20.0002 20.0000
	0	20.0004 20.0002

Material: SKD11 Surface finish: Ra 0.31 μm Rz 2.50 μm
Wire diameter: $\Phi 0.2$ Cutting time: 3.5 hours
Thickness: 120mm

High-precision step combination cutting




Material: SKD11 Surface finish: Ra 0.25 μm Rz 2.00 μm
Wire diameter: $\Phi 0.25$ Cutting time: 7 hours 18 minutes
Thickness: 60, 80mm Dimension accuracy $\pm 2\mu\text{m}$

Best surface finish



Material: SKD11 Surface finish: Ra 0.06 μm Rz 0.50 μm
Wire diameter: $\Phi 0.1$ Cutting time: 3 hours
Thickness: 30mm

Tall thickness taper combination cut

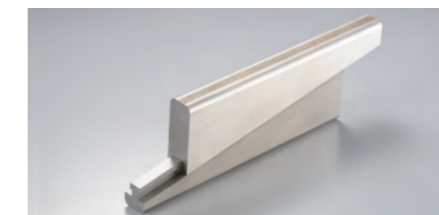


Material: SKD11 Surface finish: Ra 0.30 μm Rz 2.80 μm
Wire diameter: $\Phi 0.25$ Cutting time: 4 hours
Thickness: 100mm Taper angle: 10°

Large angle 45 taper cut



Material: SKD11 Surface finish: Ra 0.50 μm Rz 4.50 μm
Wire dia.: $\Phi 0.2$ (Megacut-T) Cutting time: 5 hours
Thickness: 40mm

Best surface finish

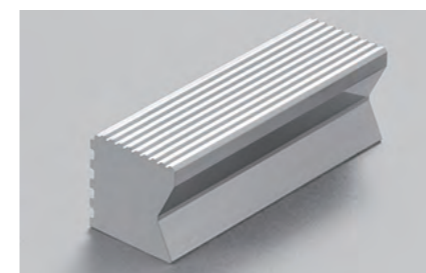


Material: SKD11 Surface finish: Ra 0.08 μm Rz 0.65 μm
Wire diameter: $\Phi 0.20$ Cutting time: 4 hours 16 minutes
Thickness: 30mm Dimension accuracy $\pm 2\mu\text{m}$

High-thickness fit cutting



Material: SKD11 Surface finish: Ra 0.55 μm Rz 4.41 μm
Wire diameter: $\Phi 0.25$ Cutting time: 21 hours (Total)
Thickness: 200mm Dimension accuracy $\pm 2\mu\text{m}$

Full circumference cutting of small-diameter gears

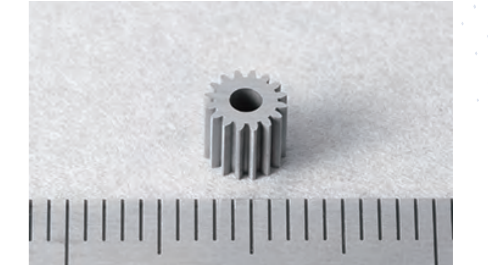

Material: SKD11 Surface finish: Ra 0.28 μm Rz 2.28 μm
Wire diameter: $\Phi 0.10$ Cutting time: 1.5 hours
Thickness: 3mm Dimension accuracy $\pm 2\mu\text{m}$


Serration cutting (die/punch)




Die
Material: SKD11 Surface finish: Ra 0.15 μm Rz 1.21 μm
Wire diameter: $\Phi 0.10$ Cutting time: 3 hours 50 minutes
Thickness: 20mm Dimension accuracy $\pm 2\mu\text{m}$

Punch
Material: WC (RG3) Surface finish: Ra 0.12 μm Rz 0.98 μm
Wire diameter: $\Phi 0.10, \Phi 0.25$ Cutting time: 8 hours 10 minutes
Thickness: 60mm Dimension accuracy $\pm 2\mu\text{m}$

Serration details

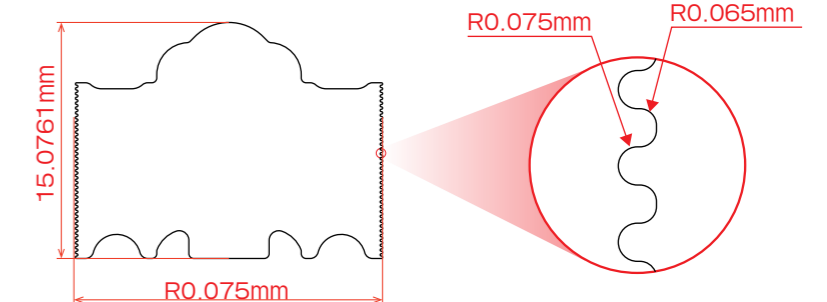


Measurement results (The numerical values show error values in mm.)

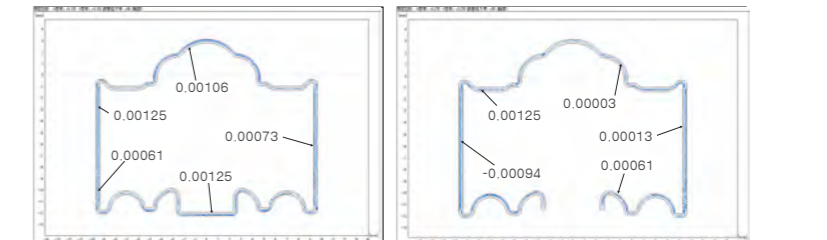

Installation environment (SuperMM80B/MM75B/M75B)

Installation environment		
Electrical equipment	Primary power source	3-phase 200/220V±10%
	Frequency	50/60Hz±1%
	Connecting terminal board	M5 (5.5mm ² to 14mm ²)
	Electric capacity (machine)	11kVA*1
	Electric capacity (cooling device)	1.43kW
Installation work	C-type electrical earth construction work for each machine (the electrical earth resistance is at most 10Ω; at least 14mm ² of flexible copper stranded wire)	
Compressed air equipment	Pressure	0.5MPa or over
	Flow	100ℓ/min (ANR)*2 or more
	Connecting port	Nylon with an external diameter of Φ8mm, urethane tube joints
Installation location	Operational Temperature range	10° C to 40° C
	Recommended temperature	20° C (±1° C)
	Humidity	30% to 75% R.H. (no condensation)
	Environment (Atmosphere)	No corrosive gas such as acid mist or dust
	Elevation	1,000m or less
	Foundation	Concrete thickness of 400 mm or more is recommended.
	Floor inclination (difference in level)	Within 5mm/m (5mm tilt or step per meter)
	Allowable vibration	Acceleration rate 0.5Gal or less, and vibration amplitude 1 μm or less (1Hz≤f≤50Hz)
	Radio interference	If the surroundings experience radio interference due to the installation of the wire EDM machines, the machine should be installed in a sealed room.
	Amount of heat generated	Power supply equipment
Machine		Maximum: 955 kcal/h
Working fluid cooling device		Maximum: 3,829 kcal/h

*1 Example installment: breaker capacity machine main unit 50A constant temperature device 10A
 *2 ANR: reference standard atmosphere (temperature 20° C, absolute pressure 101.3 kPa (760 mmHg), relative humidity 65% of the air)

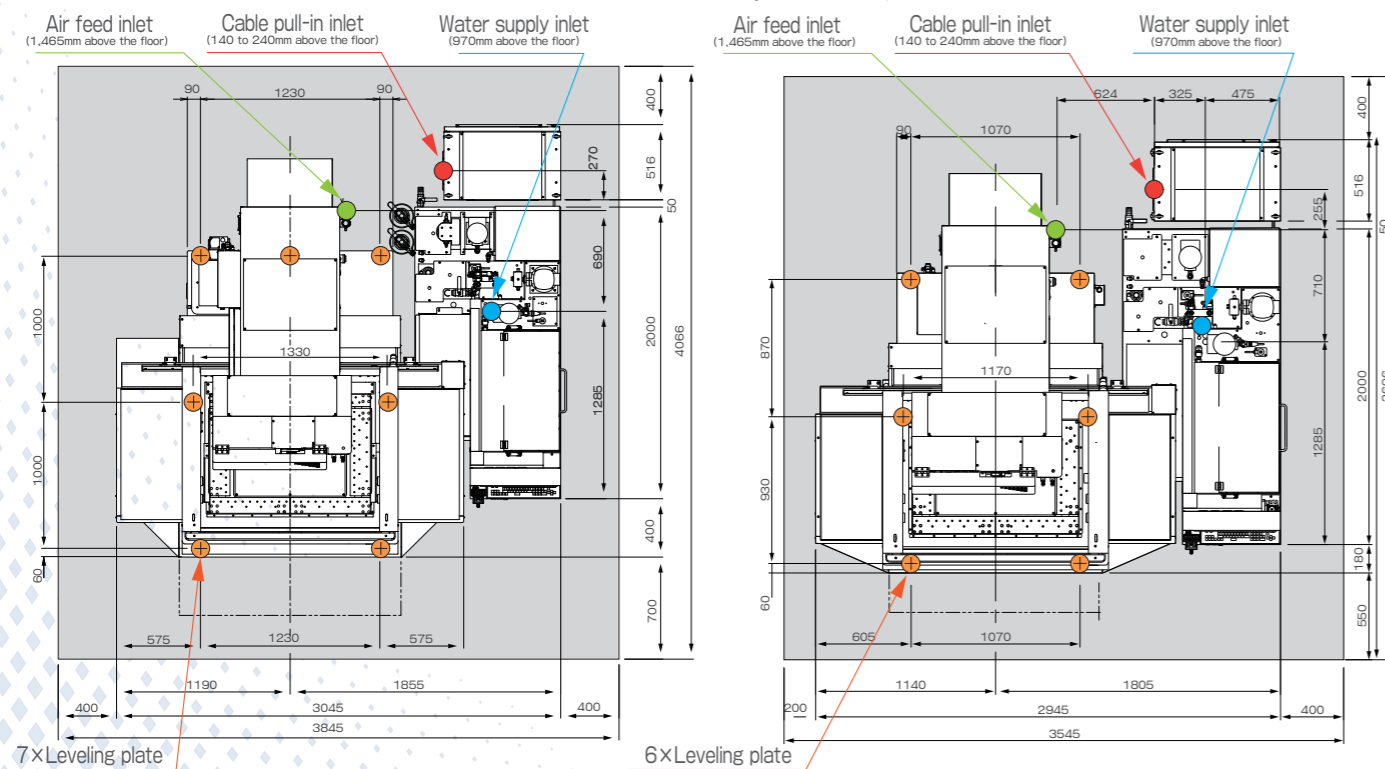


SuperMM80B
2,380 x 2,400 x 2,155mm (delivered size)

MM75B/M75B
2,280 x 2,200 x 2,155mm (delivered size)

Installation environment (MM50UP/M50HP/MM35UP/M35HP)

Installation environment		
Electrical equipment	Primary power source	3-phase 200/220V±10%
	Frequency	50/60Hz±1%
	Connecting terminal board	M5 (5.5mm ² to 14mm ²)
	Electric capacity (machine)	11kVA*1
	Electric capacity (cooling device)	1.43kW
Installation work	C-type electrical earth construction work for each machine (the electrical earth resistance is at most 10Ω; at least 14mm ² of flexible copper stranded wire)	
Compressed air equipment	Pressure	0.5MPa or over
	Flow	100ℓ/min (ANR)*2 or more
	Connecting port	Nylon with an external diameter of Φ8mm, urethane tube joints
Installation location	Operational Temperature range	10° C to 40° C
	Recommended temperature	20° C (±1° C)
	Humidity	30% to 75% R.H. (no condensation)
	Environment (Atmosphere)	No corrosive gas such as acid mist or dust
	Elevation	1,000m or less
	Foundation	Concrete thickness of 400 mm or more is recommended.
	Floor inclination (difference in level)	Within 5mm/m (5mm tilt or step per meter)
	Allowable vibration	Acceleration rate 0.5Gal or less, and vibration amplitude 1 μm or less (1Hz≤f≤50Hz)
	Radio interference	If the surroundings experience radio interference due to the installation of the wire EDM machines, the machine should be installed in a sealed room.
	Amount of heat generated	Power supply equipment
Machine		Maximum: 955 kcal/h
Working fluid cooling device		Maximum: 3,829 kcal/h

*1 Example installment: breaker capacity machine main unit 50A constant temperature device 10A
 *2 ANR: reference standard atmosphere (temperature 20° C, absolute pressure 101.3 kPa (760 mmHg), relative humidity 65% of the air)

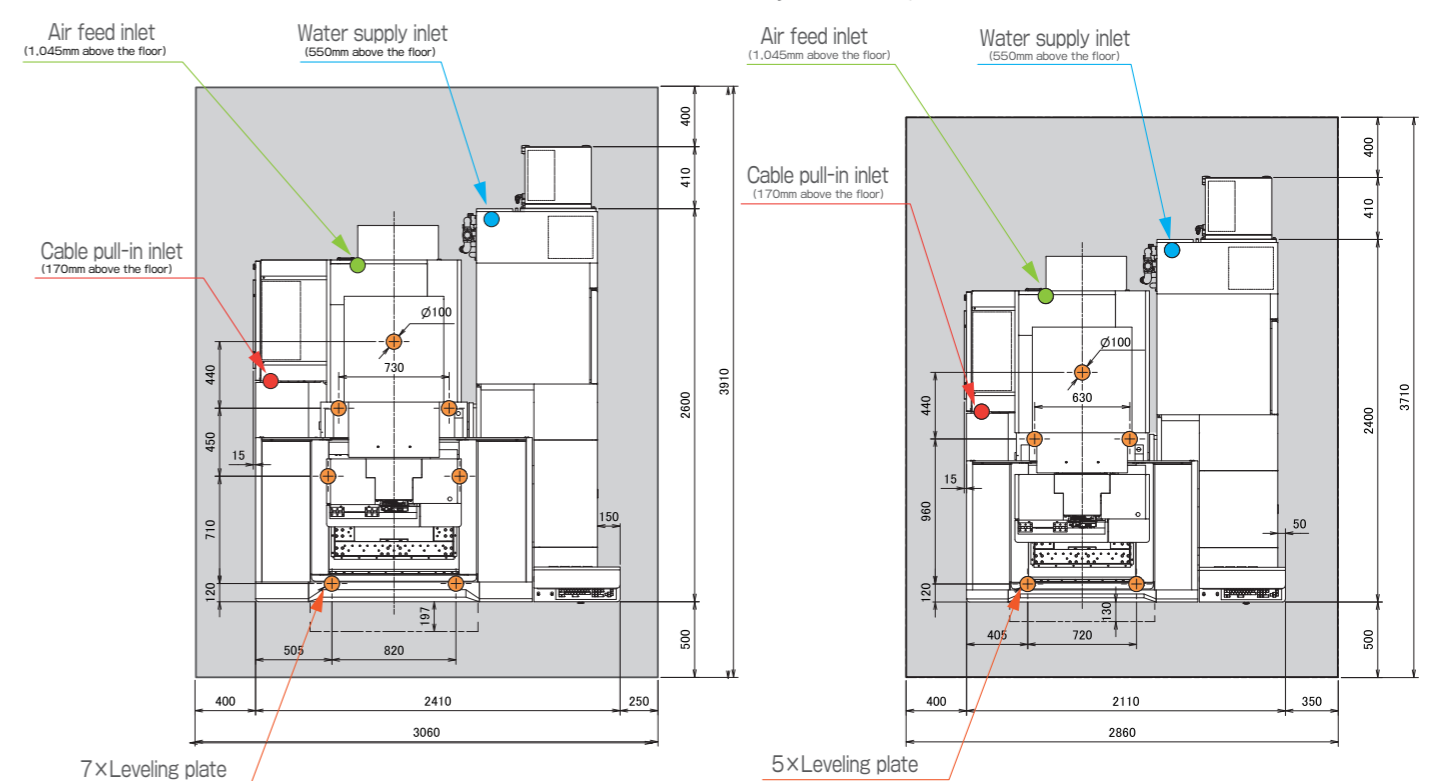

MM50UP/M50HP
1,915 x 2,260 x 2,035mm (delivered size)

MM35UP/M35HP
1,640 x 2,060 x 1,955mm (delivered size)

Options



X-Y linear scale




U-V linear scale



Suction unit of wire take-up for thin wire
Wire can be easily taken-up when using thin wire ($\Phi 0.05$ to $\Phi 0.07$).



Jet feed unit for thin wire
Wire feeding can be helped by water jet when using thin wire.

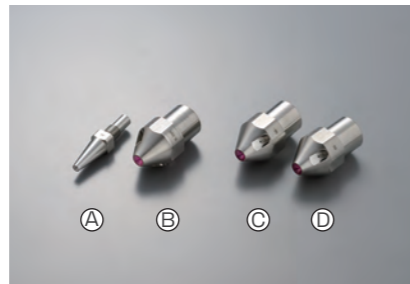

(A): UDU die guide (B)~(D): UD die guide



Large taper nozzle
Standard nozzle



20kg Roll wire feeder




Height adjustment jig
Jig for adjusting flatness when plate cutting.



Automatic vertical square jig
Wire alignment can be automatically measured.



Sub work table

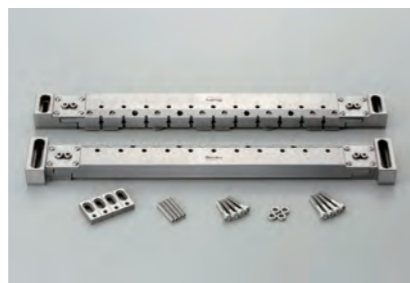

Bridge



Vise




Start hole device (SHM2) including $\Phi 1.0$ pipe
 $\Phi 0.3, \Phi 0.5, \Phi 0.8, \Phi 2.0, \Phi 3.0$ selectable



Deionizer
Ion exchange resin 10Lx2




Rust-proof unit
Rust prevention

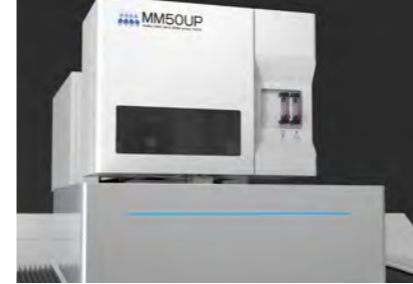


Exterior signal light
Integrated LED on the work tank front door enables operator to view the machine's operating status.



Large taper cutting
Large taper cut up to 45 degrees is available.

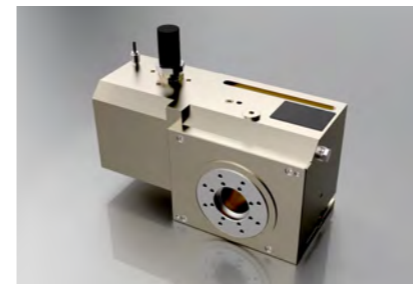


Rotary Table

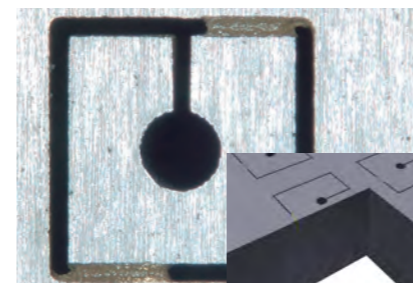

Core Stitch
Includes Core Stitch function and program conversion software for PC




Inclination compensation software
Straightness of X.Y axis can be corrected.

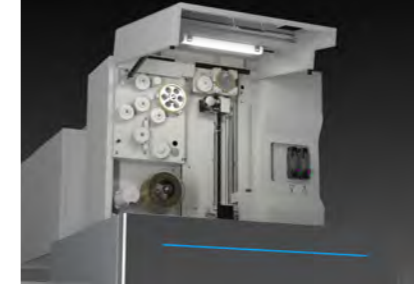

Internal lamp
LED lamp



3D Level Adjust
Correction function for workpiece upper surface

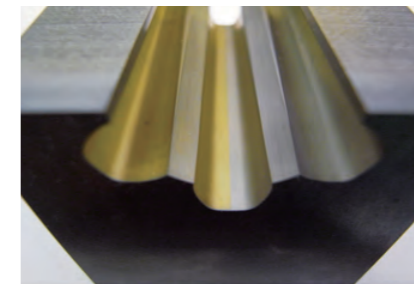

EL Coating
SF unit is required. (Specifications of $\Phi 0.10$ or more)




Core Catch
Automatic device for core. This is used together with Core Stitch function. (Core Stitch function is necessary.)



CAM-Station
CAD/CAM software (2D data: CAD/CAM 3D data: CAM)




External lamp for work tank
LED lamp

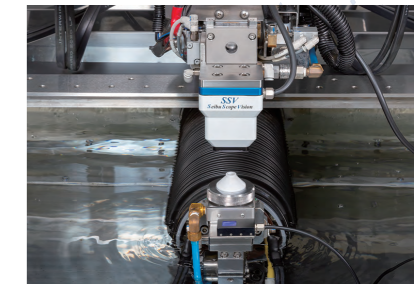

SSV
Vision measuring device using a CCD camera



Signal lamp
Status display light (2-lamp, 3-lamp type)

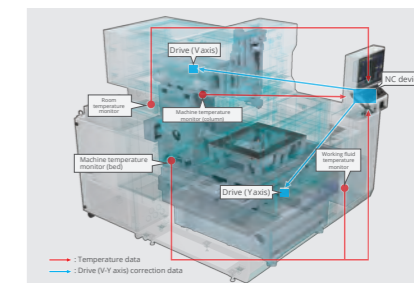

Thermal Adjust 24
Monitors the temperature inside the machine and around the machine to compensate for thermal displacement



Optional tool set

SuperMM80B/MM75B/M75B Options

◎Standard ○Option (available after shipment) ●Option (not available after shipment) ×Not available

Options	MB	MMB	Super MMB	Remarks
X-Y linear scale	○	◎	◎	
U-V linear scale	○	○	○	
Insulation table spec.	●	◎	◎	Square shaped for UMMB&MMB, U shaped for MB
Thin wire travel (Twin tension type)	×	◎	◎	Tension variation and wire vibration can be reduced.
φ0.10, φ0.15, φ0.25, φ0.30	○	○	○	You can choose the wire diameter. (φ0.20 is standard) ※1
φ0.05 thin wire specification	×	○	×	This is necessary when using φ0.05 wire. ※3
φ0.07 thin wire specification	○	○	×	This is necessary when using φ0.07 wire. ※2
φ0.10 thin wire specification	○	○	○	This is necessary when using φ0.10 wire.
Suction unit of wire take-up for thin wire	○	○	○	Wire can be easily taken-up when using thin wire (φ0.05 to φ0.07).
Jet feed unit for thin wire	○	○	○	Wire feeding can be helped by water jet when using thin wire.
20kg Roll wire feeder	○	○	◎	
Large taper nozzle	○	○	○	
Height adjustment jig	○	○	○	Jig for adjusting flatness when plate cutting.
Automatic vertical square jig	○	○	○	Wire alignment can be automatically adjusted.
Sub work table	○	○	○	
Bridge	○	○	○	
Vise	○	○	○	
Start hole device (SHM) including φ1.0	○	○	○	φ0.3, φ0.5, φ0.8, φ2.0, φ3.0 selectable
Unit for mounting SHM	○	○	○	Start hole device (SHM) function can be used. The main unit is not included.
Working fluid cooling device	○	◎	◎	Inverter working fluid cooling device
Deionizer	○	○	○	Ion exchange resin 10L×2
Rust-proof unit	○	○	○	Rust prevention
Sponge sheet for drain	○	◎	◎	Wire sludge can be removed.
Unit for filter replacement	○	○	○	Auxiliary device for filter replacement
Specified color	●	●	●	
Exterior signal light	○	○	○	Integrated LED on the work tank front door enables operator to view the machine's operating status.
Internal lamp	○	○	○	LED lamp
External lamp for work tank	○	○	○	LED lamp
Large taper cutting	○	○	○	Large taper cut up to 45 degrees is available.
3D Level Adjust	○	○	○	Correction function for workpiece upper surface
3D Level Adjust Plus	○	○	○	Probe measurement function is added to the correction function for workpiece upper surface.
SSV	○	○	○	Vision measuring device using a CCD camera
Unit for mounting SSV	○	○	○	SSV can be used. The main unit is not included.
Rotary table	○	○	○	
SF unit	○	◎	◎	Unit for finish cut
EL Coating	○	○	○	SF unit is required. (Specifications of φ0.10 or more)
Power off unit	○	○	○	Power can be automatically cut off by the command of NC program.
External alarm output unit	○	○	○	This is an output unit for external signal.
Signal lamp	○	○	○	Status display light (2-lamp, 3-lamp type)
Core Stitch	○	○	○	Brass wire of φ0.10 to φ0.25
Core Stitch conversion software	○	○	○	Includes Core Stitch function and program conversion software for PC
Core Catch	○	○	○	Automatic device for core removal. This is used together with Core Stitch function. (Core Stitch function is necessary.)
Thermal Adjust 24	○	○	○	Monitors the temperature inside the machine and around the machine to compensate for thermal displacement
Inclination compensation software	○	○	◎	Can correct the pitch error of X,Y axis.
Straightness compensation software	○	◎	◎	Straightness of X,Y axis can be corrected.
CAM-Station	○	○	○	Integrated CAM software (2D data: CAD/CAM 3D data: CAM)
Smart CAD	○	○	○	Integrated CAM software (2D data:CAD/CAM 3D data:CAM)
Optional tool set	○	○	○	

※1: Adjustment of automatic feeding is done for the specified diameter only before shipment. If you think the other diameter may be needed in future, specify the diameter.
 ※2: For φ0.07, take-up suction unit is included. ※3: Includes jet feeder and take-up suction unit.
 ※The back of the square-shaped insulation table is for auxiliary use. The accuracy of top surface flatness is not guaranteed.

CAD format CAM-Station

DXF, DWG, 2D/3D-IGES
 Parasolid, STL, SOLIDWORKS, STEP, IDI, BMI

DXF/DWG is a registered trademark of Autodesk.
 SOLIDWORKS is a registered trademark of (US) DS Solidworks.
 Parasolid is a registered trademark of SIEMENS.
 All other company and product names appearing in this catalogue are also registered trademarks and/or trademarks of each company.

MM50UP/35UP/M50HP/35HP Options

◎Standard ○Option (available after shipment) ●Option (not available after shipment) ×Not available

Options	M-HP	MM-UP	Remarks
X-Y linear scale	○	◎	
U-V linear scale	○	○	
Insulation table spec.	×	◎	
Thin wire travel (dancer roller type)	×	◎	Tension variation and wire vibration can be reduced.
AWF wire dia. selector※1	○	○	You can choose the wire diameter. (φ0.20 is standard)
φ0.07, φ0.10, φ0.15, φ0.2, φ0.25, φ0.30 ※2			
AWF thin wire spec.	×	○	
φ0.05 ※3			
Suction unit of wire take-up for thin wire	○	○	Wire can be easily taken-up when using thin wire (φ0.05 to φ0.07).
Jet feed unit for thin wire	○	○	Wire feeding can be helped by water jet when using thin wire.
20kg Roll wire feeder	○	○	
Large taper nozzle	○	○	
Height adjustment jig	○	○	Jig for adjusting flatness when plate cutting.
Automatic vertical square jig	○	○	Wire alignment can be automatically adjusted.
Sub work table	○	○	
Bridge	○	○	
Vise	○	○	
Start hole device (SHM2) including φ1.0	○	○	φ0.3, φ0.5, φ0.8, φ2.0, φ3.0 selectable
Unit for mounting SHM2	○	○	Start hole device (SHM) function can be used. The main unit is not included.
Working fluid cooling device	○	◎	Inverter working fluid cooling device
Deionizer	○	○	Ion exchange resin 10L×2
Rust-proof unit	○	○	Rust prevention
Sponge sheet for drain	○	◎	Wire sludge can be removed.
Specified color	●	●	
Exterior signal light	○	○	Integrated LED on the work tank front door enables operator to view the machine's operating status.
Internal lamp	○	○	LED lamp
External lamp for work tank	○	○	LED lamp
Large taper cutting	○	○	Large taper cut up to 45 degrees is available.
3D Level Adjust	○	○	Correction function for workpiece upper surface
3D Level Adjust Plus	○	○	Probe measurement function is added to the correction function for workpiece upper surface.
SSV	○	○	Vision measuring device using a CCD camera
Unit for mounting SSV	○	○	SSV can be used. The main unit is not included.
Rotary table	○	○	
SF unit	○	◎	Unit for finish cut
EL Coating	○	○	SF unit is required. (Specifications of φ0.10 or more)
Power off unit	○	○	Power can be automatically cut off by the command of NC program.
External alarm output unit	○	○	This is an output unit for external signal.
Signal lamp	○	○	Status display light (2-lamp, 3-lamp type)
Core Stitch	○	○	Brass wire of φ0.10 to φ0.25
Core Stitch conversion software	○	○	Includes Core Stitch function and program conversion software for PC
Core Catch	○	○	Automatic device for core removal. This is used together with Core Stitch function. (Core Stitch function is necessary.)
Thermal Adjust 24	○	○	Monitors the temperature inside the machine and around the machine to compensate for thermal displacement
Inclination compensation software	○	◎	Can correct the pitch error of X,Y axis.
Straightness compensation software	○	◎	Straightness of X,Y axis can be corrected.
CAM-Station	○	○	Integrated CAM software (2D data: CAD/CAM 3D data: CAM)
Smart CAD	○	○	Integrated CAM software (2D data:CAD/CAM 3D data:CAM)
Optional tool set	○	○	

※1: Adjustment of automatic feeding is done for the specified diameter only before shipment. If you think the other diameter may be needed in future, specify the diameter.
 ※2: For φ0.07, take-up suction unit is included. ※3: Includes jet feeder and take-up suction unit.

CAD format CAM-Station

DXF, DWG, 2D/3D-IGES
 Parasolid, STL, SOLIDWORKS, STEP, IDI, BMI

DXF/DWG is a registered trademark of Autodesk.
 SOLIDWORKS is a registered trademark of (US) DS Solidworks.
 Parasolid is a registered trademark of SIEMENS.
 All other company and product names appearing in this catalogue are also registered trademarks and/or trademarks of each company.